

SCENARIO TRANSMITTER

LiveIn²TM

NEW

simu-BHZ[®]
technology



To associate with the control solution

LiveIn²TM



Compatible with radio SIMU ranges:

simu-HZ[®]
technology

&

simu-BHZ[®]
technology

PLAY YOUR FAVORITE SCENARIOS FROM A WALL CONTROL POINT

The scenario transmitter gives the opportunity to play two scenarios among those created in the LiveIn2 application.

100% COMPATIBLE WITH SIMU RADIO: through LiveIn2, it can control both Hz and BHz equipment.

EASY PROGRAMMING: from the LiveIn2 app, assign to each button of the transmitter a scenario so that you can launch it directly from the transmitter. If necessary, the choice of assigned scenarios may be modified.

PRACTICAL: it can be placed wherever you want; for instance at the entrance of his house, to play the scenarios «close all» / «open all». This control point will still operate with LiveIn2 box even if there is an Internet breakdown.

CUSTOMIZABLE: a collection of frames with stylish colours and decorations lets you to customise the transmitter and bring a unique touch to your decor.

OPERATING PRINCIPLE

Before fixing the transmitter to the wall, make the following presets:

PRE-SETTINGS



1- In the LiveIn2 app, from the SETTINGS menu, add a device BHz «Remote». Let you guide by the application to pair the transmitter with its PROG button.




2- Then configure on each button of the transmitter the preferred scenario.

3- The scenario transmitter is ready to operate.

OPERATING *


FROM THE TRANSMITTER, PLAY THE DEFINED SCENARIO. This one is transmitted to the LiveIn2 box.

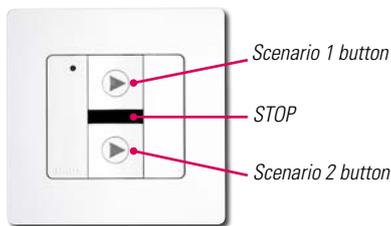

THE LIVEIN2 BOX BROADCASTS THE SCENARIO'S COMMANDS ON THE INSTALLATION DEVICES.



SHUTTERS, AWNINGS OR LIGHTS TRIGGER ACCORDING TO THE CHOSED SCENARIO.



* Operates even in case there is a network breakdown on your Internet box

TECHNICAL CHARACTERISTICS

POWER SUPPLY PILE 3V CR2430

RADIO RANGE 150 m in open field
and 15 meters through 2 reinforced concrete walls

SIZE 80x80x10mm


OPERATING TEMPERATURE 0° / +60°C

RADIO FREQUENCY 868-870 MHz

PROTECTION INDEX IP30

PRODUCT CLASS III

COMPATIBILITY Through the connected solution LiveIn2 compatible with motors and receivers SIMU-Hz and SIMU-BHz

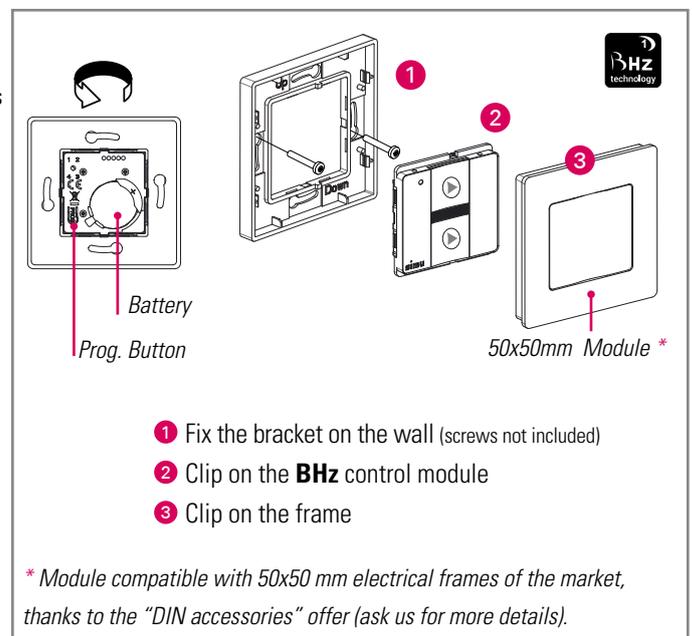

REFERENCES

DESCRIPTION	REFERENCE
TRANSMITTER BHz SCENARIO LIVEIN2	2009225

Delivered with battery.

(wall fixing screws not included)

COLLECTION OF COLOURED FRAMES TO CUSTOMIZE THE TRANSMITTER

The frames are packaged individually.

	Anthracite	Taupe	Raspberry Red	Mineral Blue	Bruched Alu	Zebrano Wood	Lily flower	Zebra	Anthracite chrome
Frames for wall transmitter	9019766	9019767	9019768	9019769	9019770	9019771	9019772	9019773	9019774
Frames for mobile transmitter	9019775	9019776	9019777	9019778	9019779	9019780	9019781	9019782	9019783